


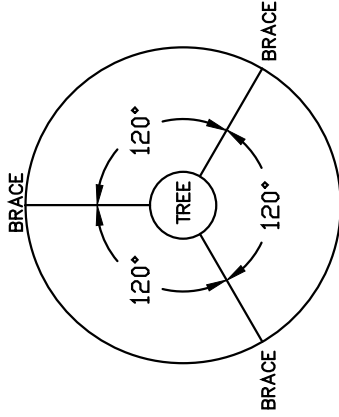

PLAN

OVER ALL GUY MATERIAL TO BE
SISAL OR OTHER BIO DEGRADABLE MATERIAL

ALL GUY MATERIALS TO BE LOCATED
ON CENTER MOST LEADER

ROOTBALL SHALL BE PLANTED
MIN 1" ABOVE WITH FINISHED GRADE.
PULL BURLAP AWAY FORM TOP
OF BALL. DO NOT LEAVE ANY
NON-BIODEGRADEABLE MATERIALS
SUCH AS TWINE, BURLAP, WIRE ETC.
ON ROOTBALL

FLAGGING ON ALL GUYS

FINISH GRADE.

BACKFILL

UNDISTURBED SOIL.

2"x4"x24" WOOD ANCHOR
24" LONG 3' BELOW
GRADE IN WELL COMPACTED SOIL.

2" DEPTH MULCH RING

SOLID SOIL PEDESTAL

REFER TO TECHNICAL SPECIFICATIONS
FOR PLANTING SOIL REQUIREMENTS

LANDSCAPE STANDARDS

REVISIONS

BY DATE

TCW APRIL2010

URBAN FORESTRY
CITY OF POMPANO BEACH

MULTI-STEM TREE PLANTING DETAIL

APPROVED BY:

DATE: APRIL 2010
DWG. NO.

103-1

SCALE: N.T.S.

URBAN FORESTER